


* WHERE THE ROADWAY SLOPE IS 3:1 OR FLATTER, THE DRIVEWAY EMBANKMENT SLOPE WITHIN THE ROADWAY R/W SHALL BE 10:1 OR FLATTER. WHERE THE ROADWAY SLOPE IS STEEPER THAN 3:1, GUARDRAIL IS USUALLY INSTALLED AT THE TOP OF THE ROADWAY SLOPE AND STEEPER SLOPES ARE PERMISSIBLE ON THE DRIVEWAY WITHIN THE R/W.

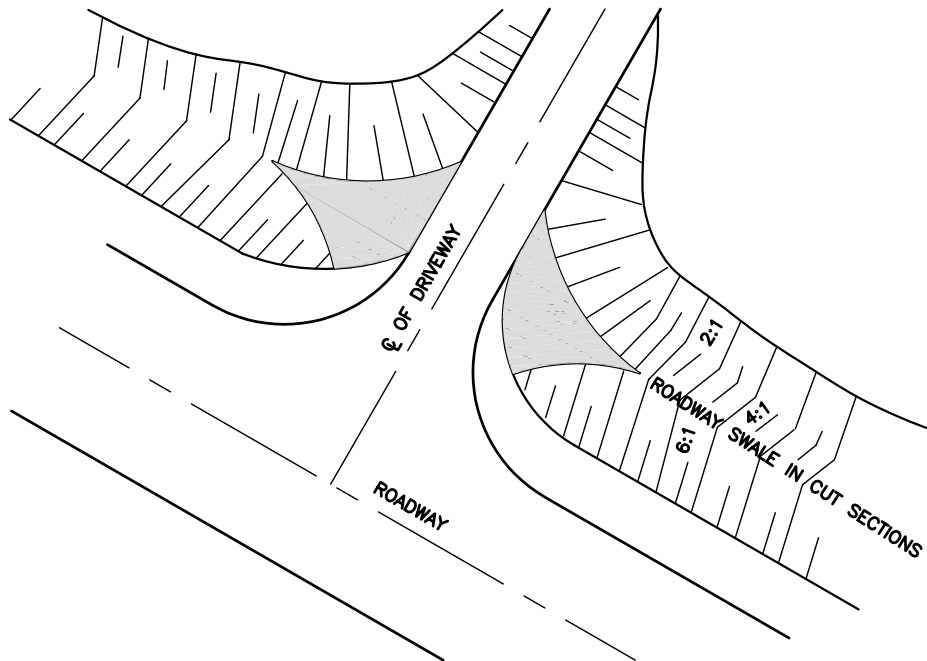

Center Township Standard Detail

DRIVEWAY FILL SLOPES

SD30